

SEL10 - SEL12

Counterbalanced forklift trucks with 1.000 kg and 1.200 Kg load capacity



A RICHIESTA

STRENGTHS:

- AC alternating current traction motor ensuring: **greater power, maximum efficiency, less maintenance**
- **Electric steering system**
- Fork lifting and lowering **proportional controls** placed on **push-button control box**
- Traction **battery** and driving type elements **320 Ah-24 V**
- Tiller arm and central drive wheel for **better ergonomics and visibility**
- Pallet **transversal loading**

UPON REQUEST:

- Traction **battery 500 Ah-24V**
- Operator transport **platform**
- Greater **lifting and load capacities**
- Special **dimensions**
- Tilting on **mast**
- **Side shift**
- Other **equipment** upon request

✓ **LOAD CAPACITY UP TO 1.000 KG AND 1.200 KG**

✓ **SPECIAL DIMENSIONS UPON REQUEST**

SOME OPTIONALS



OPERATOR TRANSPORT PLATFORM



LITHIUM BATTERY



USE IN COLD STORE





METALLIC/GALVANISED VERSION



SCALE/PRINTER

Type	Stacker trucks	Class	Counterbalanced stacker
Load capacity (Kg)	1200	Lifting capacity (mm)	4200

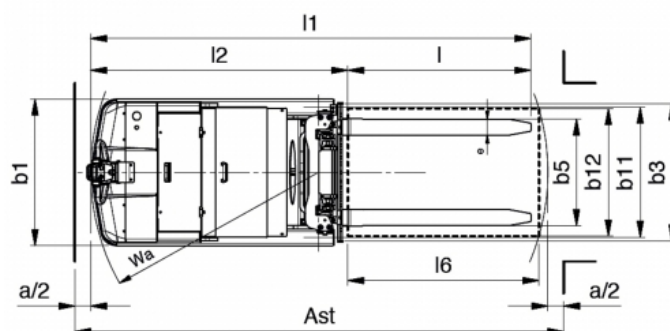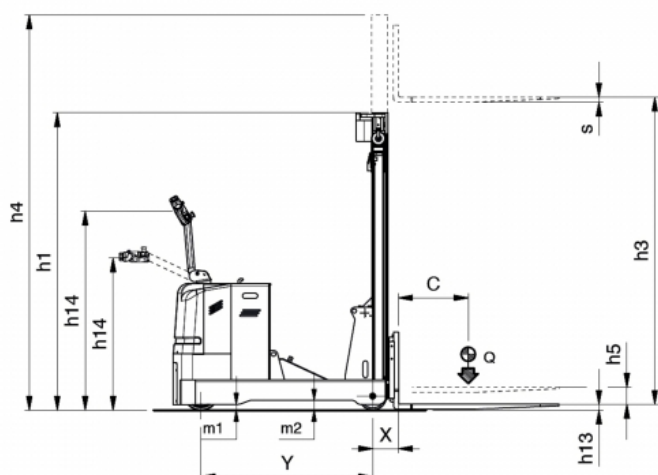

Characteristics

	1.1	Manufacturer			SAMAG	
Characteristics	1.2	Manufacturer's type designation			SEL 10	SEL 12
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas			Electric	Electric
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker			pedestrian	pedestrian
	1.5	Load capacity/rated load	Q	t	1,0	1,2
	1.6	Load centre distance	C	mm	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	185	185
	1.9	Wheelbase	Y	mm	1230	1230
Weight	2.1	Service weight (battery included)		Kg	2060	2060
	2.2	Axle loading, laden (front / rear)		Kg	543 / 2517	432 / 2828
	2.3	Axle loading, unladen (front / rear)		Kg	1100 / 960	1100 / 960
Wheels and frame	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane			Vulkollan	Vulkollan
	3.2	Tyre size, front		mm	260 x 88	260 x 88
	3.3	Tyre size, rear		mm	200 x 80	200 x 80
	3.5	Wheels, number front rear (x = driven wheels)			1X / 2	1X / 2
	3.6	Tread, front	b10	mm	/	/
	3.7	Tread, rear	b11	mm	815	815
	4.2	Height, mast lowered	h1	mm	(see table)	(see table)
Dimensions	4.4	Lift	h3	mm	(see table)	(see table)
	4.5	Height, mast extended	h4	mm	(see table)	(see table)
	4.6	Initial lift	h5	mm	(see table)	(see table)
	4.9	Height of tiller in drive position (min. / max.)	h14	mm	990 / 1427	990 / 1427
	4.15	Height of forks from ground	h13	mm	45	45
	4.19	Overall length	l1	mm	2615	2615
	4.20	Length of face of forks	l2	mm	1615	1615
	4.21	Overall width	b1 / b2	mm	920	920
	4.22	Fork dimensions	slell	mm	35 / 100 / 1000	35 / 100 / 1000
	4.23	Piastra porta forche, classe/forma secondo FEM, DIN 15173			2A	2A
	4.24	Fork - carriage width	b3	mm	860	860
	4.25	External fork widths	b5	mm	288 / 820	288 / 820
	4.31	Ground clearance, laden, below mast	m1	mm	40	40
	4.32	Ground clearance, centre of wheelbase	m2	mm	70	70
	4.34	Corridoio di lavoro con pallet 800x1000 inforcato lato 800	Ast	mm	2870	2870
	4.35	Turning radius	Wa	mm	1430	1430
Performance	5.1	Travel speed (laden / unladen)		Km/h	6 - 6	6 - 6
	5.2	Lift speed (laden / unladen)		m/s	0,12 / 0,24	0,11 / 0,23
	5.3	Lowering speed (laden / unladen)		m/s	0,33 / 0,26	0,34 / 0,27
	5.7	Gradeability (laden / unladen)		%	-	-
	5.8	Max. gradeability (laden / unladen)		%	6 / 14	5 / 14
	5.10	Service brake			Electric	Electric
Electric motor	6.1	Traction motor, power KB 60'		KW	2 AC	2 AC
	6.2	Lifting motor, performance 15% ED		KW	2,5	2,5
		Steering motor		KW	0,3	0,3
	6.3	Battery DIN 43531/35/36 A, B, C,			yes	yes
	6.4	Tension / nominal capacity		V / Ah	24 / 320-500	24 / 320-500
	6.5	Battery weight (± 5%)		Kg	366	366
	8.1	Control type			Electric AC	Electric AC

Ast includes "a" (manoeuvring space) = 200 mm and means empty pallet space

OVERALL DIMENSIONS OF LIFTING GROUPS

	Lift	h1	h3	h4	h5
Non telescopic NT	1700	2080	1620	2100	/
Duplex "DV"	2500	1780	2430	2960	150
	3000	2030	2930	3460	150
	3500	2280	3430	3960	150
	4000	2530	3930	4460	150
Triplex "TV"	4200	1980	4155	4750	/

Ast includes "a" (manoeuvring space) = 200 mm and means empty pallet space