



## SUITABLE FOR QUICK AND COMFORTABLE LOW AND MEDIUM PICKING OPERATIONS

LOGIS PICK stacker and pallet truck by Samag is ideal for quick and comfortable low and medium picking operations. The model with lifting capacity of 1710 mm allows handling 2 pallets at the same time thanks to the additional fork lifting.

LOGIS PICK stacker and pallet truck by Samag boasts the following strengths:

- **traction motor** and AC alternating current electronics ensuring **greater power**, maximum life span and **efficiency**, with **less maintenance**
- all control buttons are positioned on **push-button control box** for comfortable and immediate use by the operator
- **double rollers** as standard
- **battery charge check indicator** as standard
- traction **battery** DIN 230 Ah 24 V
- once set on the special variator, the **speed remains constant in every situation**, even on ramp both upwards and downwards, optimising the truck control
- **load backrest** (optional) on model with lifting capacity of 770 mm
- built-in **battery charger** (optional)

### ✓ PALLET TRUCK LOAD CAPACITY UP TO 2.000 KG

✓ STACKER TRUCK LOAD CAPACITY 800 KG + 1200 KG

✓ SPECIAL DIMENSIONS UPON REQUEST

## SOME OPTIONALS



OPERATOR TRANSPORT PLATFORM



LITHIUM BATTERY



USE IN COLD STORE




METALLIC/GALVANISED VERSION




SCALE/PRINTER

Type	Power pallet trucks	Class	Power pallet trucks for non-intensive use
Load capacity (Kg)	2000	Lifting capacity (mm)	1710

LOGIS PICK H 770

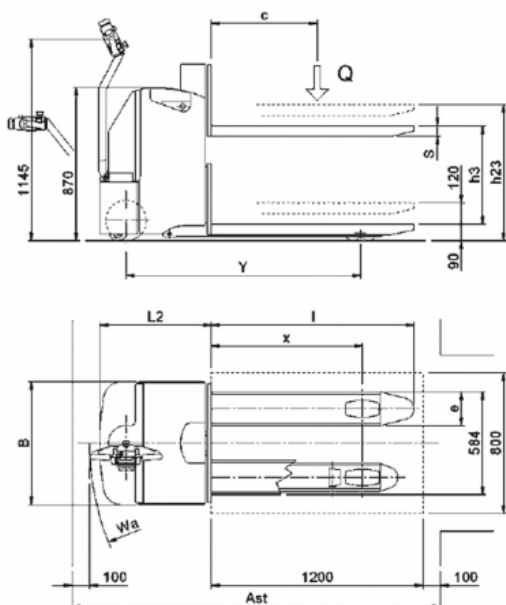

LOGIS PICK H 1710

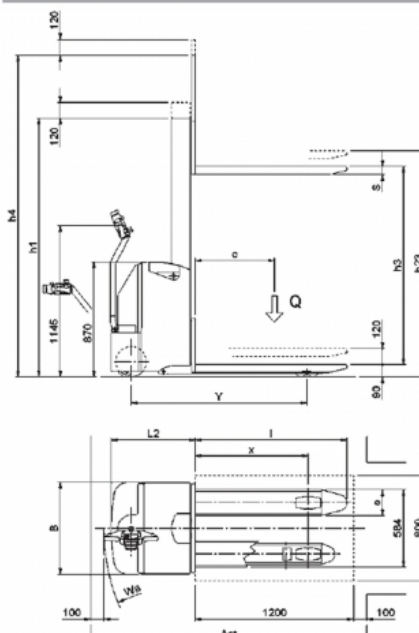

## Characteristics

	1.1	Manufacturer			SAMAG	
Characteristics	1.2	Manufacturer's type designation			LOGIS PICK H770	LOGIS PICK H1710
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas			Electric	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker			pedestrian	
	1.5	Portata nominale	Q	t	2	
		Portata come trasportatore	Q	t	2	
		Portata come elevatore	Q	t	0,8	
	1.6	Load centre distance	C	mm	600	
	1.8	Load distance, centre of drive axle to fork	x	mm	757 (1)	
	1.9	Wheelbase	Y	mm	1257 (1)	
Weight	2.1	Service weight (battery included)		Kg	680	690
	2.2	Axle loading, laden (front / rear)		Kg	755 / 1925	760 / 1930
	2.3	Axle loading, unladen (front / rear)		Kg	505 / 175	510 / 180
Wheels and frame	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane			Polyurethane	
	3.2	Tyre size, front		mm	230 x 75 / 100 x 40	
	3.3	Tyre size, rear		mm	85 x 70	
	3.5	Wheels, number front rear (x = driven wheels)			1X / 2-4	
	3.6	Tread, front	b10	mm	505	
	3.7	Tread, rear	b11	mm	390	
	4.2	Height, mast lowered	h1	mm	---	1960 (2)
Dimensions	4.3	Free lift	h2	mm	---	
	4.4	Lift	h3	mm	560	1500
	4.5	Height, mast extended	h4	mm	---	2435 (2)
	4.6	Initial lift	h5	mm	---	
	4.8	Seat height / stand height	h7	mm	---	
	4.9	Height of tiller in drive position (min. / max.)	h14	mm	1145	
	4.15	Height of forks from ground	h13	mm	90	
	4.19	Overall length	l1	mm	1795	
	4.20	Length of face of forks	l2	mm	645	
	4.21	Overall width	b1	mm	700	
	4.22	Fork dimensions	slell	mm	60 x 194 x 1150	
	4.24	Fork - carriage width	b3	mm	---	
	4.25	External fork widths	b5	mm	584	
	4.32	Ground clearance, centre of wheelbase	m2	mm	40	
	4.34	Aisle width for pallets 800 x 1200 crossways	Ast	mm	2107	
Performance	4.35	Turning radius	Wa	mm	1464	
	5.1	Travel speed (laden / unladen)		Km/h	6 / 6	
	5.2	Lift speed (laden / unladen)		m/s	0,13 / 0,19	
	5.3	Lowering speed (laden / unladen)		m/s	0,13 / 0,19	
	5.7	Gradeability (laden / unladen)		%	---	
	5.8	Max. gradeability (laden / unladen)		%	7 / 20	
Electric motor	5.10	Service brake			Electric	
	6.1	Traction motor, power KB 60'		KW	1 AC	
	6.2	Lifting motor, performance 15% ED		KW	2,2	
	6.3	Battery DIN 43531/35/36 A, B, C,			yes	
	6.4	Tension / nominal capacity		V / Ah	24/230	
Altri dati	6.5	Battery weight (± 5%)		Kg	195	
	8.1	Control type			Electric AC	
	8.4	Sound level at the driver's ear according to DIN 10 053		dB/(A)	<70	

Ast includes "a" (manoeuvring space) = 200 mm and means empty pallet space  
 (1) With forks in rest position = + 75 mm  
 (2) With stabilisers raises, increases by 120 mm